



Charger 2022 ABLT

20-Inch Battery Burnisher



The Charger 2022 ABLT is the economical choice for high gloss wet-look shine applications.

- A 24-volt 235 AH battery pack provides up to 2.5 hours of burnishing.
- With a 2200 RPM motor and 60-70 lbs of pad pressure, the Charger 2022 ABLT produces a high gloss shine.
- Designed with careful attention to the machine balance, the Charger 2022 ABLT is easy to maneuver.
- Hinged 90° head mechanism for compact storage and standing pad changes.
- Multiple handle positions lets your operator find the optimal ergonomic position for comfortable operation.
- The low profile pad driver, offset from the body 6 inches to the right, makes burnishing under shelves easy.
- Quiet operation (only 68 dBA) provides scheduling flexibility to burnish floors in occupied facilities at any time, with minimal disruption to customers and co-workers.


NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA
www.nss.com



Printed on Green Seal® certified paper that contains 30% recycled post-consumer fiber.

Charger 2022 ABLT Specifications

| | |
|--------------------------------|--|
| Pad Speed | 2200 RPM |
| Pad Pressure | 60-70 lbs (27-32 kg) |
| Pad Size | 20 in (51 cm) |
| Pad Driver | 20 in (51 cm) |
| Motor | DC permanent magnet |
| Voltage | 24V |
| Power | 2.0 HP |
| Batteries | Four 6V, 235 AH |
| Drive | Pad assist (AB) |
| Switches & Controls | Tilt switch prevents accidental pad rotation in raised position Master on/off switch Handlebar lever brush control Handle on scrub head raises machine 90° from operator to pad change position |
| Overload Protection | Controller protects motors from overloads 90 amp reset circuit breaker |
| Construction | Frame 12-gage steel channel structure Housing Polyethylene with steel reinforcement Flexiwall Shield ABS plastic with steel liner Front Wheels Two 8 in by 2 in (20 cm by 5 cm) Caster One 4 in (10 cm) ball-bearing |
| Sound Level | 68 dBA |
| Dimensions | Length 60 in (152 cm) Storage Length 44 in (112 cm) Width 23 in (58 cm) Height 43 in (109 cm) |
| Weight | Machine 435 lbs (197 kg) Shipping 520 lbs (236 kg) |
| Shipping Class | 70 |
| Warranty | 3 years limited |
| Productivity | 16,260 sq ft (1,511 sq m) per hour 40,650 sq ft (3,776 sq m) per charge |

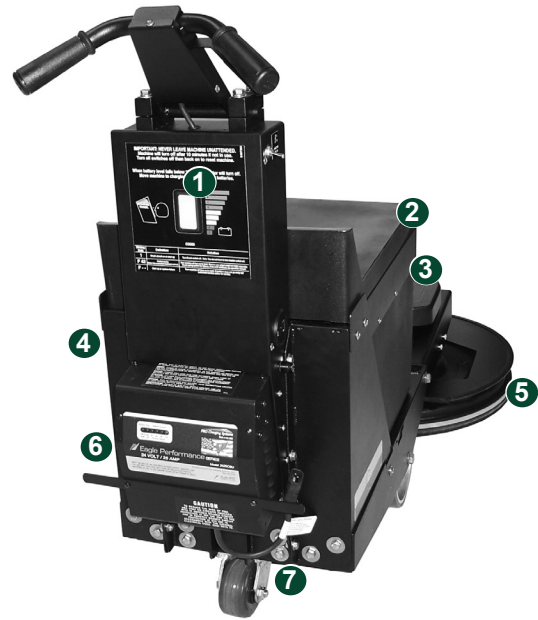

- 1 Digital readout lets the operator know the percentage of usable battery life remaining. It also displays diagnostic codes if service is needed.
- 2 The machine cover flips up for quick access to batteries.
- 3 The durable polyethylene, steel reinforced body is built for heavy duty commercial use.
- 4 The Vac-Trac Dust Control System collects floor finish and pad dust in a filter bag on the head for enhanced IAQ.
- 5 The Flexiwall shield surrounds the pad, preventing debris from entering the pad rotation area.
- 6 The on-board battery charger provides the convenience of recharging anytime, anywhere.
- 7 The built-in battery tray and drain permit quick clean-up in the case of battery acid spills inside the machine.



The 90° tip up head allows easy pad changes, an ergonomic feature that increases operator safety.

Adjustable handle allows for ergonomic use.

The body and frame of the Charger 2022 ABLT is recyclable, reducing its environmental footprint.



NSS Enterprises, Inc.
3115 Frenchmens Road
Toledo, OH 43607-2958
USA

P: (800) 677-1663
F: (419) 531-3761

mailus@nss.com
www.nss.com

Specifications subject to change without notice.

DISTRIBUTED BY